

RD15Q.1.B系列 - 桥式不可打开

Miniatur of RD15Q.1.B-Bridge type non opening



闭合状态:
Opening type:

- Q** 桥式
Bridge type
- F** 全封闭式
Enclosed
- BF** 半封闭式
Semi-enclosed

注: 无字母为普通型
Note: blank means general type

打开方式:
Opening way:



- B** 不可打开
Non-opening
- S** 双侧打开
Open of both side
- W** 外侧打开
Exterior opening
- N** 内侧打开
Interior opening
- F** 无需打开
Without opening

款式:
Style:

- Q.B** 桥式不可打开
Bridge type non-opening
- Q.N** 桥式内侧开
Bridge type interior opening
- Q.W** 桥式外侧开
Bridge type exterior opening
- Q.S** 桥式双侧可打开
Bridge type both side opening
- BF.B** 半封闭不可开
Semi-enclosed non-opening
- BF.N** 半封闭内侧开
Semi-enclosed interior opening
- BF.W** 半封闭外侧开
Semi-enclosed exterior opening
- BF.S** 半封闭双侧开
Semi-enclosed both side opening
- F.N** 封闭内侧开
Enclosed interior opening
- F.W** 封闭外侧开
Enclosed exterior opening
- F.S** 封闭双侧开
Enclosed both side opening


接头类型:
Bracket type:

- X** 斜型接头
Oblique bracket
- F** 方型接头
Square bracket

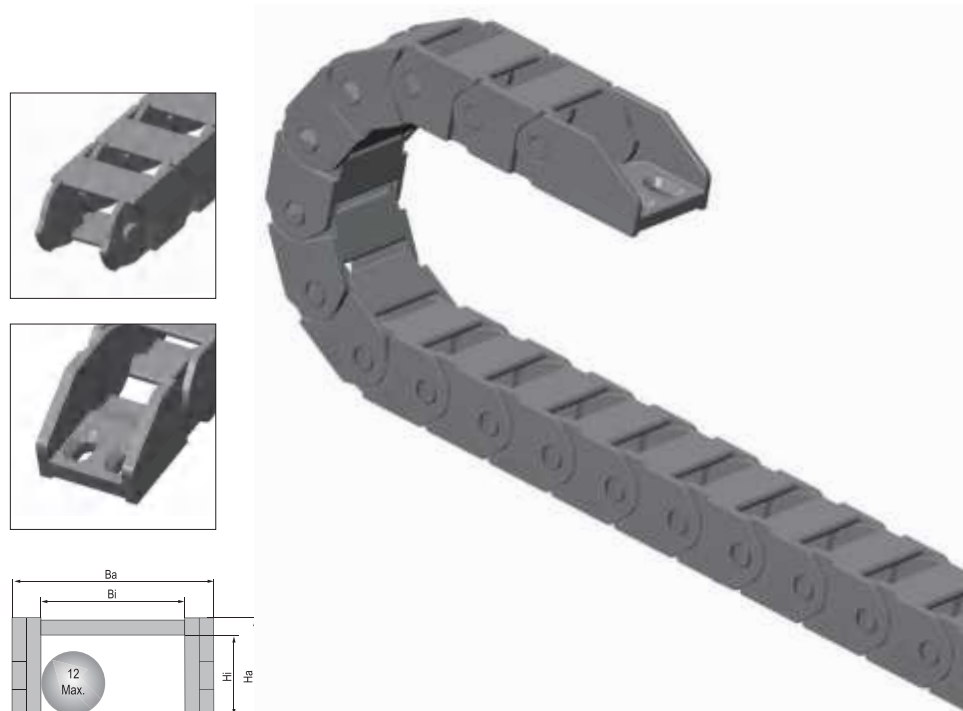

- ◎ The cable chain is low noise and smooth operation. Its tested service life is up to 20 million times.
- ◎ The cable chain can be mounted pectinate plate to fix cable better. (See accessories table)
- ◎ The cable chain is suitable for a diameter of 12mm or less of cable.
- ◎ 噪音低、运行流畅，测试使用寿命达 2 千万次
- ◎ 可配梳状板，更好的固定线缆（见选配区）
- ◎ 适用于直径 12 毫米以下线缆


主要技术参数 Basic technical data

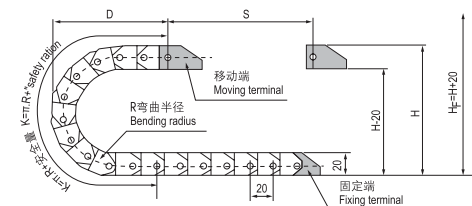

节距=20mm, 每米节数=50, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=20mm, link per meter=50, length of chain=S/2+K, S=stroke, K=π.R+“safety ration”

R	28	38
H	76	96
D	58	68
K	140	160

安装实际高度: H_p=H+20mm(负载 0.3kg/m)
Actual mounting height: H_p=H+20mm(load 0.3kg/m)



RD15Q.1.B 系列 - 桥式不可打开 Series of RD15Q.1.B-Bridge type non-opening

示意图 Drawing




选配区 Accessories table



系列号 Series No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters						代号 No.
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm)/hole distance				
		A	B	C	D	E	F						
RD15Q.1.20B	15	20	20	29	Q.B	28,38	X ₂	4.2*7L	11	C1=33 C2=31	8	29	RD15Q.1.20B-XJT
RD15Q.1.30B	15	30	20	39	Q.B	28	X ₂	4.2*7L	14	C1=33 C2=31	8	39	RD15Q.1.30B-XJT

注: B 表示不可打开
Note: B indicates that non-opening

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

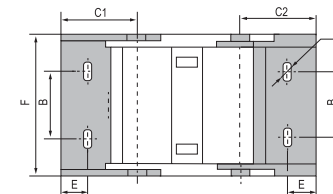

X₂ 型接头 X₂ type bracket

订货示例 Order Sample

示例 拖链内高 15mm、内宽 20mm、半径 28mm、长度 0.5 米 /25 节 (Sample: inner height 15mm, inner width 20mm, radius 28mm, length 25 links/0.5 meter)

拖链 chain RD15Q.1.20B R28 500mm /25 Links

接头 Bracket RD15Q.1.20B-XJT 副 (Set)

配件 Accessories

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.